

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 June 2003 (05.06.2003)

PCT

(10) International Publication Number
WO 03/045660 A1

(51) International Patent Classification⁷: **B29C 43/00 //**
D04H 1/00

Macmillan [GB/GB]; 2 Creskeld Drive, Bramhope, Leeds LS16 9EL (GB). **HINE, Peter, John** [GB/GB]; 110 Bentley Lane, Meanwood, Leeds LS6 4AJ (GB).

(21) International Application Number: PCT/GB02/04572

(74) Agent: **BINGHAM, Ian, Mark**; BTG International Limited, 10 Fleet Place, Limeburner Lane, London EC4M 7SB (GB).

(22) International Filing Date: 8 October 2002 (08.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0128405.8 27 November 2001 (27.11.2001) GB

(71) Applicant (for all designated States except US): **BTG INTERNATIONAL LIMITED** [GB/GB]; 10 Fleet Place, Limeburner Lane, London EC4M 7SB (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WARD, Ian,**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: PROCESS FOR FABRICATING POLYPROPYLENE SHEET

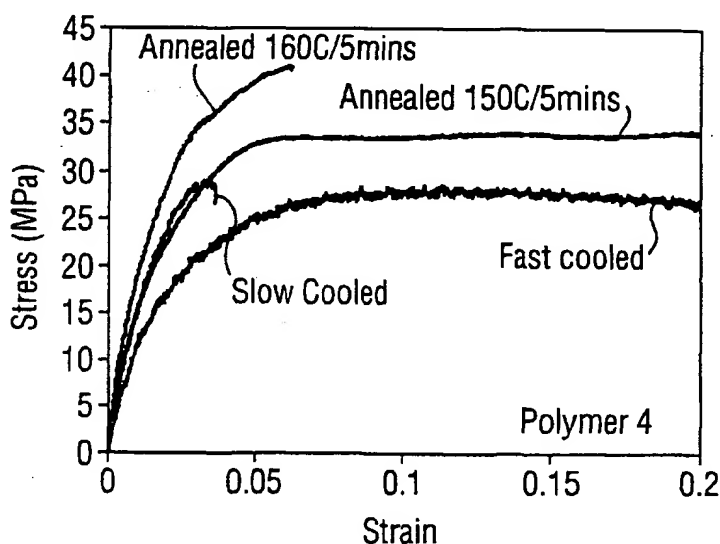

(57) Abstract: A process for production of a monolithic article from a web of fibres of oriented polypropylene homopolymer or copolymer having a weight average molecular weight (M_w) of at least 250,000 includes the steps of subjecting the web to elevated temperature and pressure sufficient to melt a proportion of the polymer and compact it, and thereby yielding an oriented phase and a matrix phase, and effecting a heat treatment selected from (i) subjecting the compacted web to a retarded rate of cooling down to a lower temperature at or below the temperature at which the recrystallisation of the matrix is complete; and (ii) annealing the compacted web at an annealing temperature within 15 °C of the temperature at which the matrix phase is completely melted. The resultant articles have good stiffness and strength, and acceptable ductility, yet corresponding articles made with polypropylene of lower M_w are brittle.

WO 03/045660 A1



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

PROCESS FOR FABRICATING POLYPROPYLENE SHEET

The present invention relates to polymer sheet materials made from oriented olefin polymer fibres or tapes, and in particular an improved process for making such materials.

In recent years, developments have been made in processes for compacting polyolefin fibres in order to make sheets of high stiffness and strength. Two-step compaction processes for melt-spun fibres employing high compaction pressures are well known.

10 An example is disclosed in GB 2253420A, in which an assembly of fibres of an oriented polymer is hot compacted in a two-step process to form a sheet having good mechanical properties. The process involves an initial step in which the fibres are brought to and held at the compaction temperature whilst subject to a pressure sufficient to maintain the fibres in contact, and thereafter compacted at a high pressure

15 (40-50 MPa) for a few seconds (the compaction pressure). In this process a proportion of the fibre surfaces, generally from 5 to 10 percent by weight, melt and subsequently recrystallise on cooling. This recrystallised phase binds the fibres together, resulting in good mechanical properties of the final sheet.

20 It is mentioned in GB 2253420A that the process can be applied to many types of oriented polymer including polyester and PEEK (polyether ether ketone) but that preferred polymers are oriented polyolefins. Polyethylene is the only polyolefin mentioned, and is used in all of the examples.

25 In WO 98/15397, an improvement to the above process is disclosed in which an assembly of melt-formed polyolefin fibres is maintained in intimate contact at elevated temperature sufficient to melt a proportion of the fibres, whilst being subjected to a compaction pressure of no greater than 10 MPa. This single-step, low-pressure process also produces products having excellent mechanical properties. If wished the

30 fibres may have been subjected to a prior crosslinking process, preferably an irradiation crosslinking process comprising irradiating the fibres with an ionising radiation in an inert environment containing alkyne or diene compounds, and then an

annealing step comprising annealing the irradiated polymer at an elevated temperature, in an inert environment containing alkyne or diene compounds.

5 In GB 2253420A it is stated that "the hot compacted materials are preferably cooled to ambient temperature under controlled conditions. Rapid cooling is less preferred. The most convenient technique is to allow the compacts to stand in the air until they have cooled to ambient temperature." The examples of GB 2253420A do not mention cooling rate.

10 In the examples of WO 98/15397 the compaction temperature and pressure were applied and the assembly was cooled under the compaction pressure to 100°C by passing a mixture of air and water through the heating platens. At this point the assembly was removed from the press and cooled to room temperature in air with no pressure applied. Cooling rate is not mentioned.

15 In *Plastics, Rubber and Composites Processing and Applications*, 1998, Vol 27, No. 4, pgs 167-171, specifically in relation to polyethylene it was stated that "the final cooling rate does not significantly affect the structure or properties of the final compacted sheet: quenched samples have been measured to have almost identical
20 properties to slow cooled samples.."

We have discovered that unlike polyethylene, in the case of polypropylene the cooling rate may have a significant effect on the final properties of the compacted sheet. We have discovered that post-compaction annealing may also have a significant effect.
25 Such measures have been shown to result in improvement of certain properties, including stiffness and yield stress, with maintenance of acceptable ductility and related properties. Surprisingly, this promising array of properties has been found to be achieved in certain polypropylene materials only.

30 Accordingly in a first aspect, the present invention provides a process for production of a monolithic article from a web of fibres of oriented polypropylene homopolymer or copolymer having a weight average molecular weight (M_w) of at least 250,000, the

process comprising the steps of subjecting the web to elevated temperature and pressure sufficient to melt a proportion of the polymer and compact it, thereby yielding an oriented phase and a matrix phase, and effecting a heat treatment selected from

- 5 (i) subjecting the compacted web to a retarded rate of cooling down to a lower temperature at or below the temperature at which the recrystallisation of the matrix is complete; and
- (ii) annealing the compacted web at an elevated annealing temperature.

10 The fibres can be made by any suitable process, for example solution or gel or melt forming, preferably by melt forming.

The term "fibres of oriented polypropylene homopolymer or copolymer" is used herein to mean all elongate elements which comprise polypropylene. They may be in the form of strands or filaments. They may be in the form of bands, ribbons or tapes,
15 formed for example by initially slitting melt formed films. Whatever their form the fibres may be laid in a non-woven web for the process of the invention. Alternatively they may be formed into yarns comprising multiple fibres, or used in the form of a monofilament yarn. The fibres are usually formed into a fabric by weaving or knitting. Optionally the fibres may have been subjected to a crosslinking process, as described
20 in WO 98/15397. Woven fabrics may comprise only fibres in the form of strands or filaments, or they may comprise a mixture of fibres in the form of strands or filaments and fibres in the form of tapes. Most preferred are fabrics which are woven from flat tapes, as these have the best mechanical properties.

25 "A retarded rate of cooling" in this specification means cooling under conditions such that heat is lost from the compacted web more slowly than if it were cooled from the elevated temperature to said lower temperature under ambient conditions, that is, in still air at ambient temperature, typically 20°C.

30 The following paragraphs further define or describe the heat treatment variant (i), of subjecting the compacted web to a retarded rate of cooling down to a lower

temperature at or below the temperature at which the recrystallisation of the matrix is complete.

The retarded cooling step (i) preferably takes place immediately after compaction.

- 5 More preferably, it takes place immediately after compaction without the compacted web having been removed from the compaction apparatus.

- 10 In this heat treatment variant (i) the mean cooling rate from the compaction temperature down to said lower temperature is suitably not greater than 10°C/min, preferably not greater than 5°C/min, more preferably not greater than 3°C/min and, especially, not greater than 2°C/min. Whilst the preceding definitions are of mean cooling rate, preferably the cooling rate is retarded for the entire cooling regime, down to said lower temperature.

- 15 Preferably said lower temperature is below the temperature at which the recrystallisation of the matrix is complete. Suitably it is up to 5°C lower. Preferably it is up to 10°C lower.

- 20 Preferably said lower temperature is in the range 100-110°C. Most preferably the lower temperature is 100°C.

The following paragraphs further describe or define the heat treatment step (ii), of annealing the compacted web at an elevated annealing temperature.

- 25 Preferably annealing takes place within 15°C of the temperature at which the matrix phase is completely melted, more preferably within 10°C of this temperature, still more preferably within 5°C of this temperature, and most preferably within 3°C of this temperature.

- 30 In principle it could be possible to anneal the compacted web at a temperature at or above the temperature at which the matrix phase is completely melted, because of the stabilisation provided by the oriented phase, which melts at a higher temperature.

Preferably, however, the annealing temperature is below the temperature at which the matrix phase is completely melted.

Most preferred, therefore, is an annealing temperature which is within 3°C of the temperature at which the matrix phase is completely melted, but below that temperature. Such an annealing temperature has been found to give excellent results.

Preferably a heat treatment step (ii) is effected for at least 1 minute, preferably for at least 2 minutes, more preferably for at least 3 minutes, and most preferably for at least 5 minutes.

A heat treatment step (ii) may be effected immediately after compaction. Alternatively it is possible to temporally space the compaction step and a heat treatment step (ii), in accordance with the present invention. That is, a process in which compaction takes place and the compacted web is cooled by a regime not necessary in accordance with heat treatment step (i), but which is later heated for such a heat treatment step (ii) then to be carried out, is not excluded.

One embodiment of the present invention employs only a retarded cooling step (i). The retarded cooling is suitably carried out immediately after compaction, without the compacted web having been cooled first. Thus, the temperature of the compacted web is allowed to fall from the compaction temperature to the lower temperature.

One embodiment of the present invention employs only an annealing step (ii).

In one embodiment of the present invention both a retarded cooling step (i) and an annealing step (ii) are employed. For example an annealing step (ii) may be followed directly by a retarded cooling step (i), with the starting point of the retarded cooling step being the annealing temperature rather than a compaction temperature, and with the annealing temperature and said lower temperature providing the temperature end points across which the mean cooling rate may be determined. In another example

compaction is followed by a retarded cooling step (i), followed by later reheating to effect an annealing step (ii).

It is preferred that the hot compaction process of the invention uses a compaction pressure not exceeding 10 MPa. It is also preferred that a single pressure is used throughout the hot compaction process. Most preferred pressures are between 1 and 7 MPa, particularly between 2 and 5 MPa. It is preferred that the hot compaction pressure is maintained during cooling.

The minimum temperature at which the fibres should be contacted is preferably that at which the leading edge of the endotherm, measured by Differential Scanning Calorimetry (DSC), of the constrained polymer fibres extrapolated to zero intersects the temperature axis. Preferably, the temperature at which the fibres are compacted is no greater than the constrained peak temperature of melting at the ambient compaction pressure - i.e. the temperature at which the endotherm reaches its highest point. The proportion of the fibres which is melted during the hot compaction process is generally between 10 and 50 percent by weight.

Preferably the fibres used in the present invention have a weight average molecular weight (M_w) in the range 250,000 to 450,000, most preferably 330,000 to 400,000, as determined by the method hereinafter described. The polymer is preferably a polypropylene homopolymer, but may be a copolymer comprising polypropylene. Generally any copolymer containing polypropylene such as those disclosed in WO 98/15397 may be used.

Preferably the fibres have not been subjected to a prior crosslinking process, for example of the type described in WO 98/15397.

Compaction of the polypropylene may be carried out in an autoclave, or in a belt press or other apparatus in which the assembly is fed through a compaction zone where it is subjected to the required elevated temperature and pressure. Thus, the process may be operated as a continuous or semi-continuous process. Cooling is preferably effected

whilst the compacted web is restrained against dimensional change, for example by being held under tension, which may be applied uniaxially or biaxially, or by being still under a compaction pressure. The restraint may assist the maintenance of good properties in the oriented phase.

5

The monolithic article may be regarded as a polypropylene composite made up of a polypropylene matrix phase which was produced during the process, and a polypropylene fibre phase, a proportion of which may show selective surface melting, arising from the process. The properties of each are of significance in achieving a monolithic article of the required properties, and they may be defined, and studied, separately.

10

Preferably the Young's modulus of the matrix phase is at least 0.9 GPa, more preferably at least 1.2 GPa, more preferably 1.5 GPa, and most preferably at least 1.7 GPa.

15

Preferably the failure strength of the matrix phase is at least 20 MPa, more preferably at least 25 MPa.

20 Preferably the failure strain of the matrix phase is at least 5%.

Preferably the Young's modulus in the longitudinal direction (which may alternatively be called the draw or axial direction) of the fibre phase is at least 4 GPa, more preferably at least 6 GPa.

25

Preferably the failure strength in the longitudinal direction of the fibre phase is at least 250 MPa, more preferably at least 350 MPa, and most preferably at least 400 MPa.

Preferably the failure strain in the longitudinal direction of the fibre phase is at least 5%, more preferably at least 8%, and most preferably at least 12%.

30

EXAMPLE SET A

The effect of cooling rate was established by examining the cooling of a completely melted fabric, to simulate the melted matrix phase in a hot compacted sheet. It has been found that the properties of a hot compacted sheet are a combination of the properties of the original oriented fibres (the reinforcing phase), and the portion of the fibres which are melted (the matrix phase). Therefore by examining the properties of a melted fabric which has been cooled at different rates, it is possible to simulate the effect of cooling a hot compaction sheet at different rates.

The fabrics used were made from a number of different melt-formed polypropylene homopolymers detailed in Table 1 below. The reinforcement type indicates the type of fibre from which the fabric is woven.

TABLE 1

Polymer No.	1	2	3	4
Reinforcement type	Multifilament bundles	Fibrillated tape	Flat tape	Flat tape
Young's modulus $E(\text{GPa})$	9.5	10.9	6.2	6.8
Failure strength $\sigma_F (\text{MPa})$	453	350	370	422
Failure strain $\epsilon_F(\%)$	12	6	16	16
Density $\rho (\text{kg/m}^3)$	907	912	932	910
M_n	38,500	55,800	56,100	78,100
M_w	191,000	290,000	325,000	360,000

M_w and M_n were measured by Rapra Technology Limited, of Shropshire, UK. Details of the testing are as follows:

- | | | |
|---|--|--|
| | Instrument | Waters 150CV |
| | Columns | Plgel 2 x mixed bed-B, 30cn 10 microns |
| | Solvent | 1,2-dichlorobenzene with anti-oxidant |
| 5 | Flow-rate | 1.0 ml/min (nominal) |
| | Temperature | 140°C (nominal) |
| | Detector | refractive index and differential pressure |
| | GPC system calibrated with polystyrene | |
- 10 Woven cloths made of each of the above polymers were completely melted by heating two layers of cloth in a hot press at 200°C. The pressure applied was 2.8 MPa, although since the samples were completely melted this was not critical. Cooling was achieved either by removing the sample and plunging it into water (quenching) or in the hot press by passing a coolant through the heated platens, after switching off the
- 15 heating. Depending on the rate of cooling required 100% water, or air containing water droplets, was used as the coolant. In this example fast cooling in the press means a cooling rate of 20-30°C/min. The slow cooling rate, 1-2°C/min, was achieved by just switching off the heating and allowing the assembly to cool naturally in air.
- 20 Mechanical properties
- The stress/strain behaviour of the above cooled films was measured using an RDP Howden servo-mechanical tensile testing machine. The tensile tests on the compacted sheets and the melted films were carried out following ASTM D638 using a dumbbell
- 25 shaped specimen. A normal strain rate of 10^{-3} s^{-1} was used for all the tests. The sample strain during the tests was measured using a Messphysik video extensometer. Five samples were tested for each material at a temperature of $20 \pm 2^\circ\text{C}$ and a relative humidity of $35 \pm 5\%$.
- 30 Typical stress-strain curves are shown in Figure 1, for each of the four polymer tests. The results show that for all four polymers, the quenched samples were ductile and drew in a stable manner with the formation of a stable neck region. Strain for these

samples was measured from the crosshead speed, rather than directly on the sample, for if the neck formed outside the measured region, the strain in the measurement region actually decreased. However their Young's modulus and yield stress values were relatively low. The fast cooled and the quenched traces have been displaced a
5 small way along the x-axis simply in order to display each trace clearly.

For the sample made using the fast cooling regime on-press, differences in behaviour were seen. The lowest molecular weight polymer (Polymer 1, Graph 1) showed an initial linear region, with an increased slope compared to the quenched sample, a yield
10 point, again higher than the quenched sample, then rupture. This form of stress-strain behaviour is often termed necking-rupture. Two intermediate molecular weight samples (Polymers 2 and 3, Graphs 2 and 3) showed the formation of a neck but drawing did not stabilise and rupture occurred at ~25% (0.25) strain. Only the highest molecular weight Polymer 4 (Graph 4) showed stable drawing following application of
15 this cooling rate.

All the samples made by slow cooling showed necking-rupture or brittle behaviour. The failure strains of the original fibres were mostly between 10 and 20% (0.1 and 0.2): therefore if the matrix fails below this value then a hot compacted composite
20 would see premature matrix failure before the reinforcing phase can reach full load carrying capacity, leading to premature delamination. It is seen that at the slowest cooling rate, none of the polymers reached this desired failure strain. In particular, the low molecular weight Polymer 1 showed brittle failure at a low stress. It may be seen that ductile-type behaviour became more pronounced as M_w increases; the highest
25 failure strain was shown by Polymer 4. In most cases the initial slope of the slow-cooled samples was higher than either of the other two cooling rates, indicating that slow cooling gave highest Young's modulus. The failure stress for slow-cooled samples of Polymers 1 and 2 was less than for the fast cooled samples, but the failure stress for slow-cooled samples of Polymers 3 and 4 was approximately equal to the
30 fast cooled samples.

Density

The densities of the original oriented materials and the compacted sheets were measured using a density column. The column was made from a mixture of diglycidyl ether and isopropanol to give a density range of ~890 to ~930 kg/m³. The results are shown in Table 2.

TABLE 2

Polymer	Material and cooling regime	Density (kg/m ³)
1	Original fibres	907
	Melted film - quenching	911
	Melted film - slow cooling	915
2	Original fibres - (cloth D)	912
	Melted film - quenching	920
	Melted film - slow cooling	924
3	Original tapes (cloth E)	910
	Melted film - quenching	920
	Melted film - slow cooling	925

Modulus

The Young's Modulus was determined in the initial linear region of the stress strain curve following the guidelines of ASTM D638. The results are shown in Table 3 below.

TABLE 3

Polymer	Young's modulus E (GPa)		
	Quenching	Fast cooling	Slow cooling
1	1.04 ± 0.02	1.85 ± 0.05	2.08 ± 0.13
2	1.00 ± 0.03	1.58 ± 0.06	1.71 ± 0.11
3	1.00 ± 0.09	1.24 ± 0.09	1.33 ± 0.01
4	0.95 ± 0.06	1.22 ± 0.10	1.37 ± 0.08

5

Tables 2 and 3 show the density and Young's modulus of the various melted films. Both of these properties can be used as a measure of the crystallinity of the films, as one can attribute increases in either parameter with an increase in crystallinity. As the cooling rate is increased, the density of Young's modulus for each polymer type decreases, suggesting the expected decrease in crystallinity (and associated improvement in ductility).

It is clear from the results in Example Set A that the cooling rate of the hot compaction process is a key process parameter, because it has a significant effect on the mechanical properties of the matrix phase, probably due to changes in crystallinity. The above results show that slow cooling may lead to good Young's modulus and failure strain properties, but compromised ductility; but that for polymers of higher M_w a useful level of ductility may be achieved, especially for uses in which stiffness and failure strain are of primary importance. In general, slow cooled samples appear to show higher stiffness values than fast cooled samples, but may be brittle if the polypropylene is of low molecular weight. However, samples may show reasonable ductility if the polypropylene is of higher molecular weight.

EXAMPLE SET B

In these examples partially melted monolithic articles were prepared. Polymer 4 of Example Set A was used, with 4 layers of woven cloth in the compaction assembly. Compaction conditions of 5 minutes at 193°C and a compaction pressure of 4.8 GPa were employed. Slow cooling (20-30°C/min) or fast cooling (1-2°C/min) was effected as described in Example Set A.

Figure 2 shows the temperature/time plots for the two samples. It will be seen that the fast cooled sample undergoes very rapid cooling to 150°C. The slow cooled sample takes about 25 minutes to drop from 193°C to 150°C, and about 80 minutes to drop from 193°C to 100°C.

Melting points

The melting behaviour of the hot compacted sheets made using the two cooling rates were measured using Differential Scanning Calorimetry. Peak melting points of the matrix phase and oriented phase were thereby determined. Results are given in Table 4 below

TABLE 4

Cooling	Peak melting point of matrix phase (°C)	Peak melting point of oriented phase (°C)
Fast cooled	162	177
Slow cooled	168	179

25

It will be seen that with the slower cooled product the peak melting point of the matrix is substantially increased whilst that of the oriented phase is increased only a little. Given that the aim is to improve the microstructure of the matrix phase, preferably to

be more highly crystalline and to have a larger average crystal size whilst not substantially affecting the oriented phase, this is a promising result.

Stress-strain testing

5

Table 5 below shows average results from mechanical testing of the two samples.

TABLE 5

Cooling	Modulus (GPa)	Strength (MPa)	Failure strain
Fast cooled	3.0 ± 0.1	130 ± 10	13 ± 2
Slow cooled	3.3 ± 0.1	141 ± 6	11 ± 1

10

It will be seen that the mechanical properties of the slow cooled sample were good, in showing improved modulus and strength without significant loss of ductility.

Peel Strength

15 Experiments were also made to assess the peel strength of the slow and fast cooled samples, and the averaged results are shown in Table 6 below.

TABLE 6

Compaction	Cooling	Peel strength N/10mm
4.2 MPa/193°C	Fast cooled	7.5 ± 3.5
	Slow cooled	7.7 ± 1.9

20

The measured peel strengths were all quite high, with the slow cooled value holding up well in comparison to the fast cooled value.

EXAMPLE SET CPeel Strength

- 5 Next, samples of a hot compacted composite material from Polymer 1 were made as described in Example Set B above, ie only partially melted, and subjected to peel strength testing. The averaged results are shown in Table 7 below.

TABLE 7

10

Compaction	Cooling	Peel strength N/10mm
4.2 MPa/193°C	Fast cooled	3.0 ± 1.6
	Slow cooled	1.8 ± 0.6

Both values are low but slow cooling is shown to be disadvantageous, a finding not applicable to Polymer 4, having a much higher molecular weight.

15 EXAMPLE SET D

- Our results indicate that slow cooling can lead to high stiffness and high yield stress. However with polypropylene of low M_w the trade off of loss in ductility is severe; such materials are brittle after compaction and have a low failure strain. However with
- 20 polypropylene of higher M_w ductility, and associated properties such as peel strength, may be acceptable. Thus, use of a higher M_w polypropylene with slow cooling after compaction offers the prospect of an article with an attractive blend of properties.

- On the basis that a similar blend of properties might be achievable by holding the
- 25 compacted article at an elevated temperature for a dwell time, annealing experiments were carried out.

The first annealing experiments were carried out on the fully melted Polymer 4, to make an article with, in effect, 100% matrix material, as this is the phase that is most

likely to be affected, and any effects should be easy to interpret. The annealing regimes studied were 150°C for five minutes and 160°C for 5 minutes.

Differential scanning calorimetry (DSC) yielded the results in Table 8 below, indicating that annealing can substantially affect the crystallinity (indicated by the enthalpy) and the crystal size (indicated by the peak melting point), and that the higher temperature has a more pronounced effect.

TABLE 8

10

	Enthalpy J/g /%	Peak melting point °C
As made	63.4 / 31	164
150°C/5 minutes	70.1 / 34	163
160°C/5 minutes	85.3 / 41	169

The articles were subjected to tensile testing at 20°C and at a range of elevated temperatures and the results are presented in Figs. 3 and 4.

15 From the traces in Fig. 3 it was determined that the modulus of each article was as follows:

Fast cooled (no annealing) 1.37 GPa
 Slow cooled (no annealing) 1.85 GPa
 20 Annealed, 160°C/5 mins 1.9 GPa
 Annealed, 150°C/5 mins 2.2 GPa

The change in crystalline morphology is reflected in an increase in modulus, and also in yield stress, although the material annealed at 160°C still remained pseudo-ductile.
 25 Finally the DTMA temperature scan shown in Fig. 4 (scan from 20 to 160°C in 5°C increments, tested at frequency of 1 Hz using a dynamic strain of 0.05%) shows the 160°C annealed sample to have significantly better higher temperature performance. In Fig. 3 comparisons are shown with the slow cooled and fast cooled samples of

Example Set A. In Fig. 4 a comparison is shown with an "original" article, this being one cooled at 20-30°C /min after compaction.

EXAMPLE SET E

5

In these tests, woven layers of Polymer 4 were used for the manufacture of partially melted hot compacted articles having an oriented fibre phase and a matrix phase. The conditions were 193°C for 5 minutes, at a compaction pressure of 4.2 MPa. Annealing was as described in Example Set D.

10

DTMA temperature scan testing as described in Example Set D was carried out. The results are shown in Fig. 5. The trace marked "original" refers to a sample cooled at 20-30°C/min after compaction.

15

The relevance of the Fig. 5 results is that stiffness as a function of the temperature at which the tests were carried out is an indication of expected creep or high temperature performance. It is likely to depend on the matrix phase, between the oriented phase. It will be seen that there is an improvement in the performance in the annealed sample at temperatures above 40°C, relative to the fast cooled sample.

20

OVERALL CONCLUSIONS

Use of slow cooling and/or annealing, applied to compacted articles made in accordance with the present invention, comprising polypropylene of M_w at least 250,000, offers advantages in terms of high stiffness, high yield strength, high failure strength, good maintenance of stiffness at elevated temperatures and surprisingly good ductile-type properties such as peel strength and failure strain. The good balance of properties is surprising having regard to the brittleness and/or low yield strength of corresponding articles made using polypropylene of M_w less than 250,000.

30

CLAIMS


1. A process for production of a monolithic article from a web of fibres of oriented polypropylene homopolymer or copolymer having a weight average molecular weight (M_w) of at least 250,000, the process comprising the steps of subjecting the web to elevated temperature and pressure sufficient to melt a proportion of the polymer and compact it, thereby yielding an oriented phase and a matrix phase, and effecting a heat treatment selected from
- 5 (i) subjecting the compacted web to a retarded rate of cooling down to a lower temperature at or below the temperature at which the recrystallisation of the matrix is complete; and
- 10 (ii) annealing the compacted web at an elevated annealing temperature.
2. A process as claimed in claim 1 wherein for the heat treatment step (i) the mean cooling rate from the compaction temperature down to said lower temperature is not greater than 5°C/minute.
- 15 3. A process as claimed in claim 2 wherein for the heat treatment step (ii) the mean cooling rate from the compaction temperature down to said lower temperature is not greater than 3°C/minute.
- 20 4. A process as claimed in any preceding claim wherein for the heat treatment step (ii) the elevated annealing temperature is within 15°C of the temperature at which the matrix phase is completely melted.
- 25 5. A process as claimed in any preceding claim wherein for the heat treatment step (ii) the annealing temperature is below the temperature at which the matrix phase is completely melted, and up to 10°C below that temperature.
- 30 6. A process as claimed in claim 5 wherein for the heat treatment step (ii) the annealing temperature is below the temperature at which the matrix phase is completely melted, and is up to 5°C below that temperature.

7. A process as claimed in any preceding claim wherein for the heat treatment step (ii) the compacted web is within the defined temperature range for at least 3 minutes.
- 5 8. A process as claimed in claim 7 wherein for the heat treatment step (ii) the compacted web is within the defined temperature range for at least 5 minutes.
9. A process as claimed in any preceding claim wherein the heat treatment is carried out with the web restrained against dimensional change.
- 10 10. A process as claimed in claim 9 wherein the heat treatment is effected with the compacted web under tension.
11. A process as claimed in claim 9 wherein the heat treatment is effected with the compacted web retained in the compaction apparatus.
- 15 12. A process as claimed in any preceding claim wherein the compaction pressure does not exceed 10 MPa.
13. A process as claimed in any preceding claim wherein the weight average molecular weight (M_w) of the fibres is in the range 250,000 to 400,000.
14. A process as claimed in claim 13 wherein the weight average molecular weight (M_w) of the fibres is in the range 300,000 to 400,000.
- 25 15. A process as claimed in any preceding claim wherein the fibres are melt formed fibres.
16. A monolithic article manufactured by a process as claimed in any preceding claim, having a matrix of polymer produced by selective melting of oriented fibres during the process, and oriented fibres remaining from that selective melting.
- 30

17. A monolithic article as claimed in claim 16 wherein the Young's modulus of the matrix phase is at least 0.9 GPa.
18. A monolithic article as claimed in claim 16 or 17 wherein the failure strength of
5 the matrix phase is at least 20 MPa.
19. A monolithic article as claimed in claim 16, 17 or 18 wherein the failure strain of the matrix phase is at least 5%.
- 10 20. A monolithic article as claimed in any of claims 16 to 19 wherein the Young's modulus in the longitudinal direction of the oriented fibre phase is at least 4 GPa.
21. A monolithic article as claimed in any of claims 16 to 20 wherein the failure strength in the longitudinal direction of the oriented fibre phase is at least 250 MPa.
- 15 22. A monolithic article as claimed in any of claims 16 to 21 wherein the failure strain in the longitudinal direction of the oriented fibre phase is at least 5%.
- 20 23. A process for fabricating a monolithic article of a polypropylene polymer, or a monolithic article thus formed, substantially as hereinbefore described with particular reference to the accompanying examples.

1/3

Fig.1.

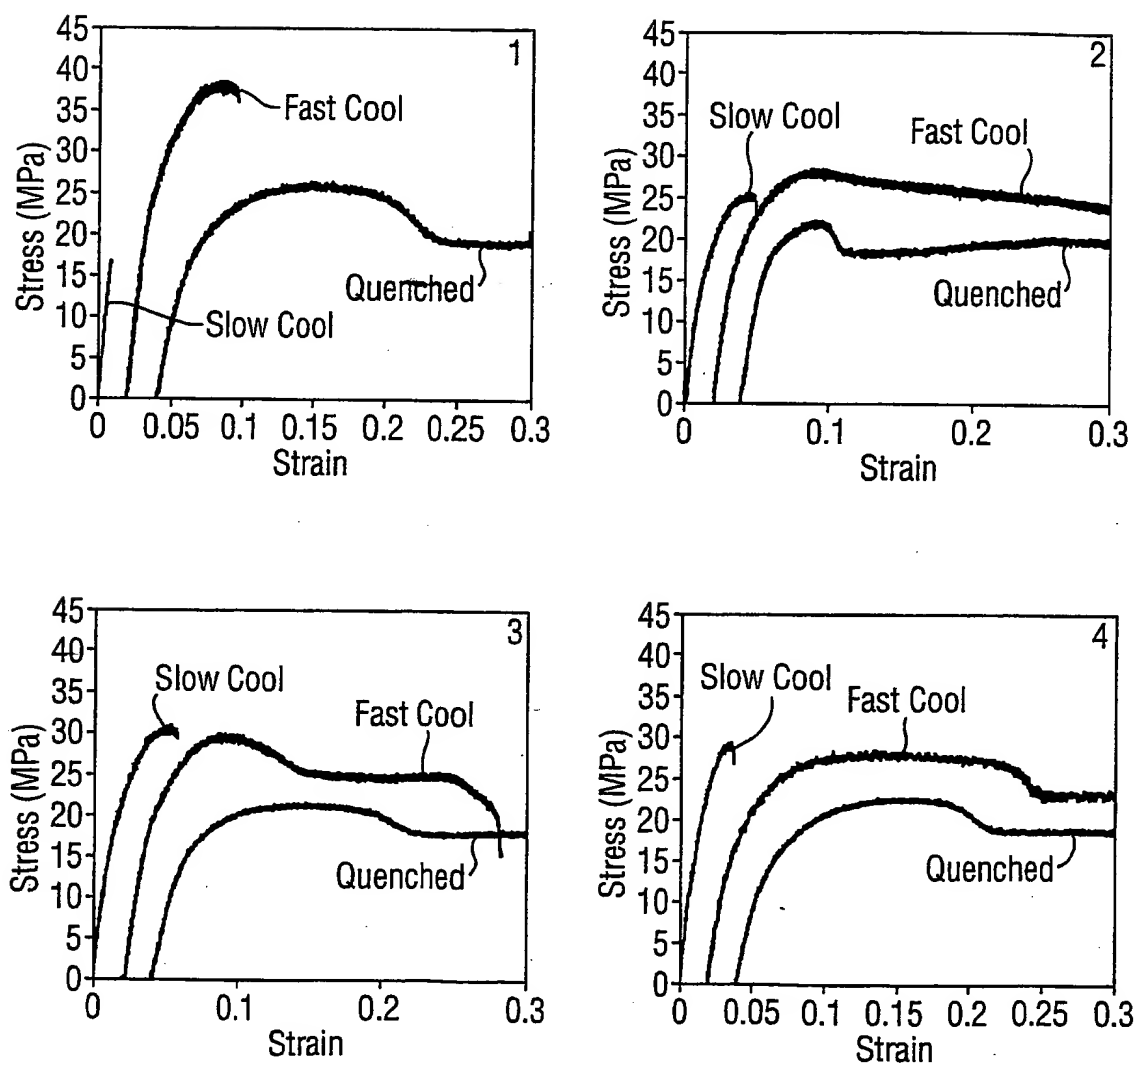

2/3

Fig.2.


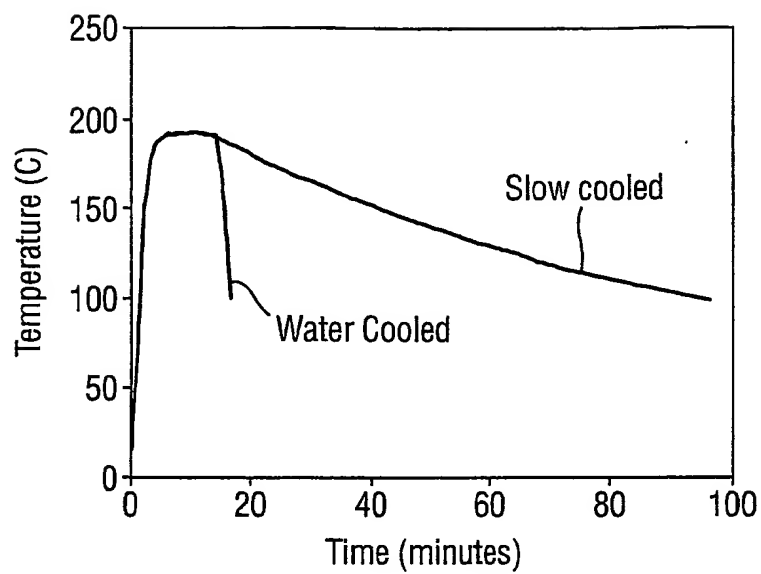


Fig.3.

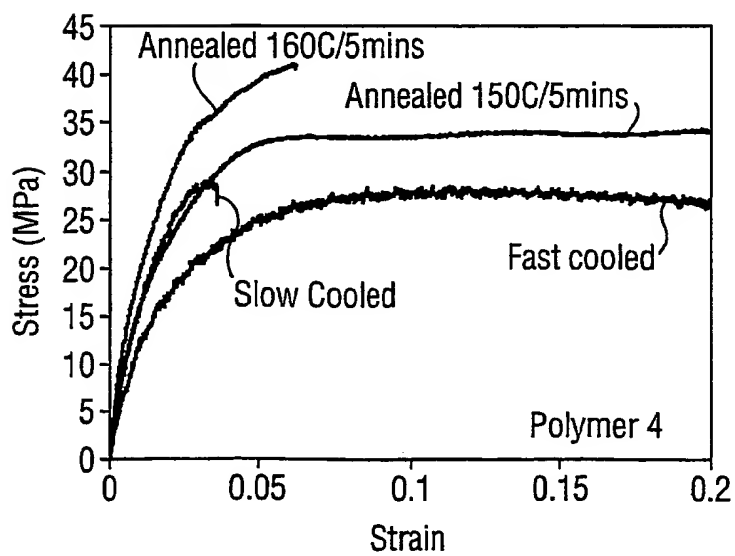

3/3

Fig.4.


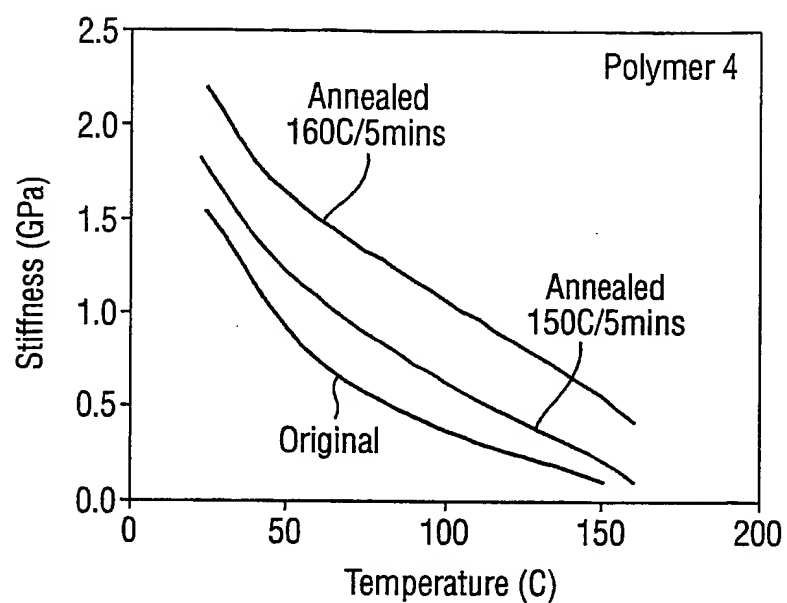


Fig.5.

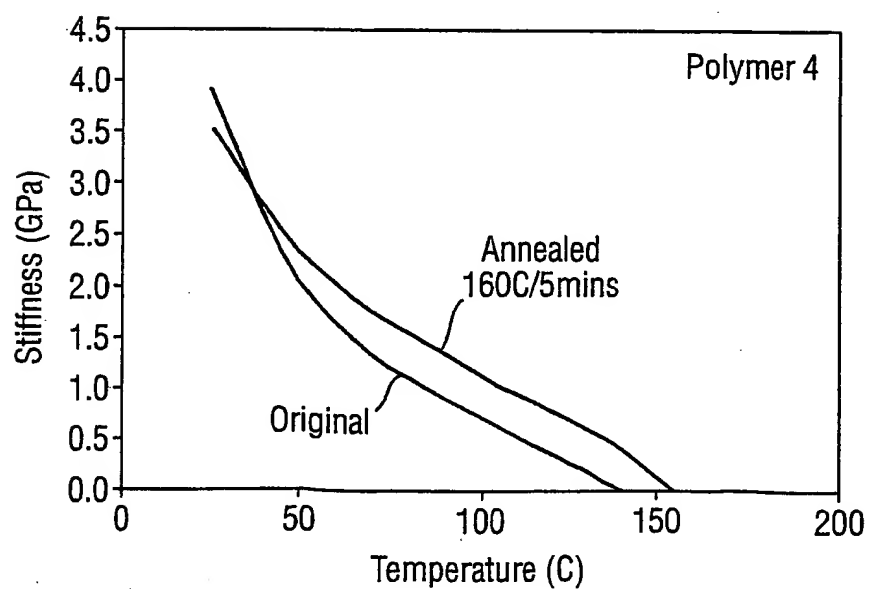

INTERNATIONAL SEARCH REPORT

PCT/GB 02/04572

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B29C43/00 //D04H1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 15397 A (BONNER MARK JAMES ;HINE PETER JOHN (GB); UNIV LEEDS INNOVATIONS LT) 16 April 1998 (1998-04-16) cited in the application page 2, line 4 -page 3, line 34 page 11, line 10 - line 30 page 17, line 15 - line 28	1-23
A	GB 2 253 420 A (BRITISH TECH GROUP) 9 September 1992 (1992-09-09) cited in the application page 5, line 5 - line 16; examples	1-23
A	US 3 997 386 A (KITA HIROAKI ET AL) 14 December 1976 (1976-12-14) claim 2; examples	1-23



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

16 January 2003

Date of mailing of the international search report

29/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Topalidis, A

INTERNATIONAL SEARCH REPORT

PCT/GB 02/04572

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 962 205 A (CAPACCIO GIANCARLO ET AL) 8 June 1976 (1976-06-08) claim 1; examples 1,2 ---	1,16,23
A	US 4 642 153 A (LOHR THOMAS E) 10 February 1987 (1987-02-10) column 6, line 6 - line 65 ---	1,16
A	WO 88 09406 A (AUTOMOTIVE INVESTMENT CO) 1 December 1988 (1988-12-01) page 7, line 10 - line 37 -----	1,16,23

INTERNATIONAL SEARCH REPORT

information on patent family members

PCT/GB 02/04572

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9815397	A	16-04-1998	AT 220605 T	15-08-2002
			DE 69714063 D1	22-08-2002
			DK 934146 T3	11-11-2002
			EP 0934145 A2	11-08-1999
			EP 0934146 A1	11-08-1999
			ES 2176791 T3	01-12-2002
			WO 9815397 A2	16-04-1998
			WO 9815398 A1	16-04-1998
			JP 2001501685 T	06-02-2001
			US 6312638 B1	06-11-2001
			US 2002003317 A1	10-01-2002
			US 6328923 B1	11-12-2001
			US 6458727 B1	01-10-2002
			US 2002101009 A1	01-08-2002
			JP 2001501684 T	06-02-2001
GB 2253420	A	09-09-1992	AT 124644 T	15-07-1995
			CA 2081469 A1	08-09-1992
			DE 69203310 D1	10-08-1995
			DE 69203310 T2	16-11-1995
			EP 0531473 A1	17-03-1993
			ES 2074881 T3	16-09-1995
			WO 9215440 A1	17-09-1992
			JP 3233932 B2	04-12-2001
			JP 6502227 T	10-03-1994
			JP 2002054068 A	19-02-2002
			US 5628946 A	13-05-1997
			US 6277773 B1	21-08-2001
			US 6017834 A	25-01-2000
US 3997386	A	14-12-1976	JP 50151971 A	06-12-1975
			CH 578924 A5	31-08-1976
			DE 2520457 A1	04-12-1975
			FR 2272810 A1	26-12-1975
			GB 1490437 A	02-11-1977
US 3962205	A	08-06-1976	GB 1469526 A	06-04-1977
			AU 6593674 A	28-08-1975
			BE 811853 A1	04-09-1974
			CA 1059278 A1	31-07-1979
			CS 181752 B2	31-03-1978
			DE 2410747 A1	12-09-1974
			ES 423956 A1	01-11-1976
			FR 2220547 A1	04-10-1974
			IE 39164 B1	16-08-1978
			IT 1013059 B	30-03-1977
			JP 1212096 C	12-06-1984
			JP 50025679 A	18-03-1975
			JP 57046414 B	02-10-1982
			JP 1409849 C	24-11-1987
			JP 59192534 A	31-10-1984
			JP 62016813 B	14-04-1987
			LU 69546 A1	21-06-1974
			NL 7402956 A ,B	10-09-1974
			ZA 7401145 A	29-01-1975
			DE 2447322 A1	17-04-1975
			FR 2246587 A1	02-05-1975
			GB 1498628 A	25-01-1978

INTERNATIONAL SEARCH REPORT

Information on patent family members

PCT/GB 02/04572

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3962205	A	IT 1021689 B	20-02-1978
		JP 50077479 A	24-06-1975
		JP 57037454 B	10-08-1982
		JP 1807600 C	10-12-1993
		JP 3038970 B	12-06-1991
		JP 63165120 A	08-07-1988
		JP 1629251 C	20-12-1991
		JP 59071411 A	23-04-1984
		JP 63012767 B	22-03-1988
		JP 61092827 A	10-05-1986
		JP 3032821 A	13-02-1991
		NL 7413069 A ,B,	07-04-1975
		US 4569983 A	11-02-1986
		US 4287149 A	01-09-1981
US 4642153	A	10-02-1987	
		EP 0184423 A2	11-06-1986
		JP 1992549 C	22-11-1995
		JP 7007283 B	30-01-1995
		JP 61184601 A	18-08-1986
		DE 3420247 A1	06-12-1984
		GB 2140739 A ,B	05-12-1984
		IT 1174102 B	01-07-1987
WO 8809406	A	01-12-1988	
		AU 1807788 A	21-12-1988
		WO 8809406 A1	01-12-1988

THIS PAGE BLANK (USPTO)